



Appreciating Quality Automation

We at “DOLPHIN AUTOMATION” thank you for the purchase of this product and we assure you for our best services.....always!

Digital Humidity Controller

OPERATING INSTRUCTIONS H 181/381

Specifications :-

1. Display : .39” for PV & .20” for SV
2. Range : 10 to 95% RH
3. Resolution : 0.1 RH
4. Accuracy : +/- 3% (Full Scale)
- 5- Hysterisis : 0 to 99 RH
6. OFFSET : -9.9 to 9.9 RH
- 7- Relay Action : Humidity / Dehumidity Selectable
8. Control Action : ON / OFF or Proportional

CYCLE TIME : 1-99 Sec
Prop Band : 0-99

Terminal Connection


- 1-Connect terminals of the controller according to the terminal connections

Set Point

Set Point can be viewed by pressing **SET** KEY.

Set Point can be changed by pressing **SET** KEY +  &  KEYS

Programming the Humidity Controller

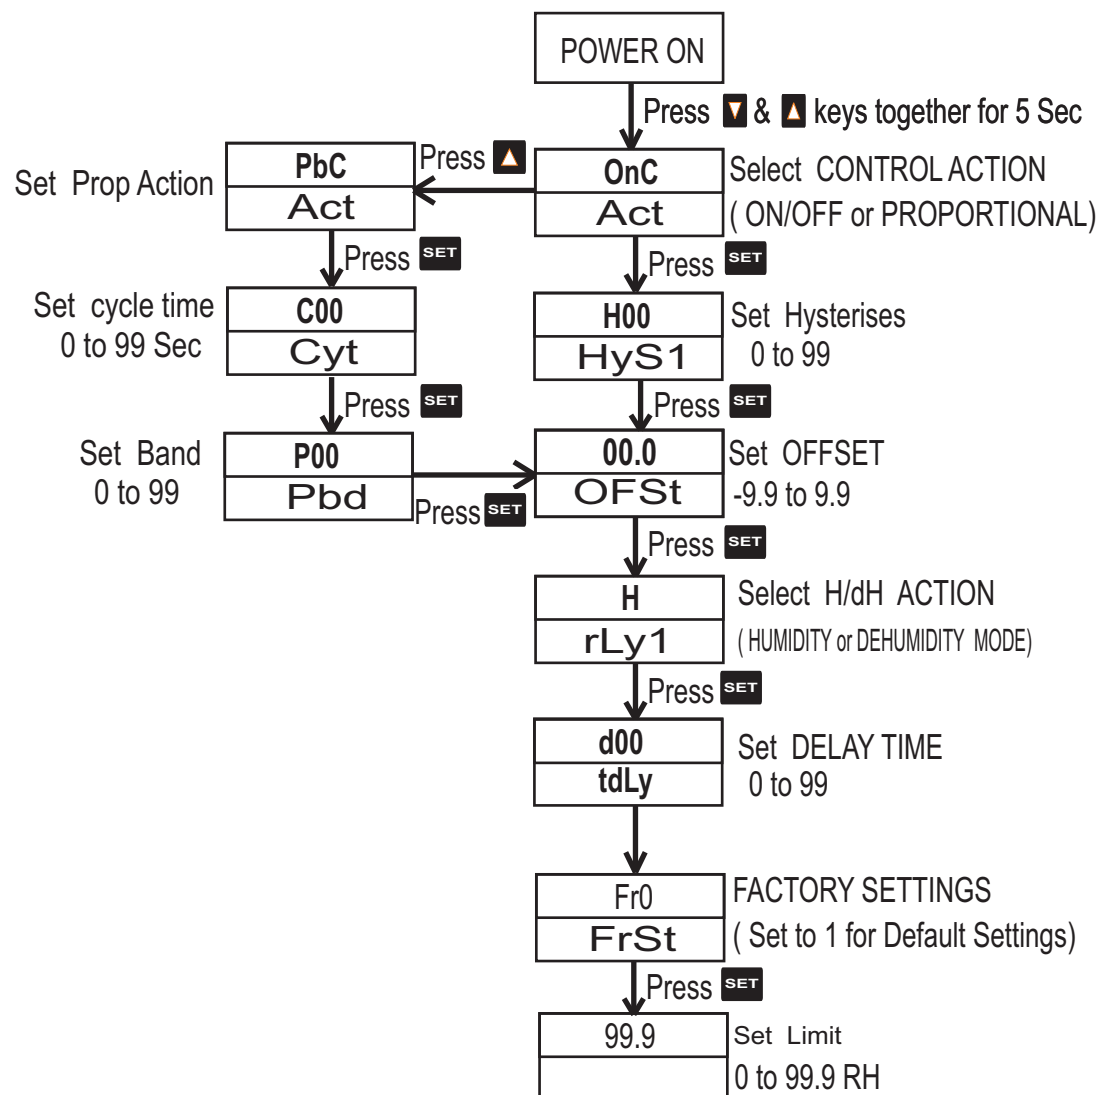

Note: To come out of Programming leave the Keys unpressed for more than 4 seconds or Switch off the Controller